

2 IN 2

NEO

DN 12 / 16 / 20 / 25

Separable quick assembly pipe system

■ Flexible stainless steel hose

* 1.4404 - AISI 316L

■ Standard type

* MF 012

* MF 015

■ Material of insulation

* High-temperature resistant EPDM up to
+150 °C continuous load (+175 °C intermittent)

■ Wall thickness

* 14 mm (2IN2 NEO)

■ Other types are available on request

■ Installation does not require special tools

■ Sensorline, silicone insulated permanently temperature resistance up

* +180 °C

■ Fire reaction

* Moderately flammable (DIN 4102-B2)

■ Heat conductor



* Conductivity value

* $\lambda / 0^{\circ}\text{C} = 0,038 \text{ W/(mK)}$

■ Vapour diffusion resistance

* $\mu \geq 3000$

* DIN EN ISO 12572

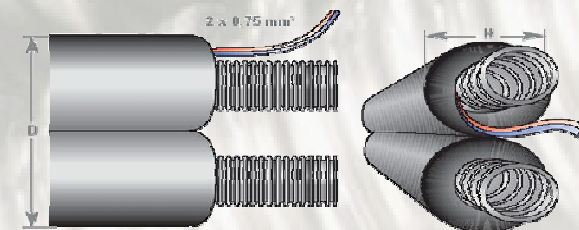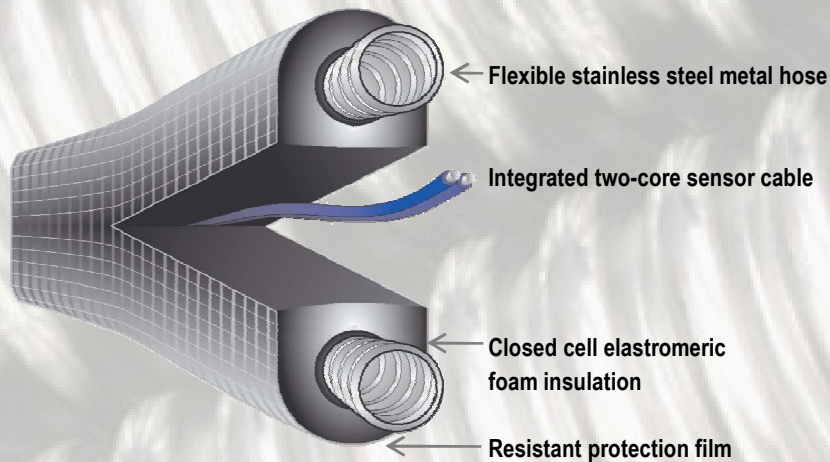

DN		2 IN 2 NEO	
mm	inch	D [mm]	H [mm]
12	5/16"	90	45
16	5/8"	100	50
20	3/4"	110	55
25	1"	120	60

SOLAR[®]

METAL FLEX

SOLAR Metal Flex San. Ve Tic. Ltd. Şti.

TMOSB 10.Sok. No:4 TR-34959 İstanbul

Tel.: +90 216 593 19 49

info@solarmetalflex.com.tr